

PW80/PW50



YAMAHA

www.legends-yamaha-enduros.com

Like father, like son.

Spending time with your kids has traditionally been a parental obligation.

That being the case, what better way to spend that time together than riding Yamaha motorbikes.

The PW50 is the best bike for kids who have never ridden before. Its fully automatic transmission means no clutch, no changing, and no hassle.


For young riders aged 8 to 10 years, we offer the PW80. It's powered by a powerful two-stroke

79cc engine featuring Autolube oil injection and CD ignition.

Both the PW50 and PW80 have been designed with important features such as padded handlebars and extra shock absorption for a smooth ride and agile handling. The engine, exhaust system and drive

train are all covered with heat shields for easy care. There's even an adjustable throttle limiter that lets you control the speed of young riders until they gain experience.

Why not discover just how much fun spending time with your kids can be. On a Yamaha PW50 or PW80.

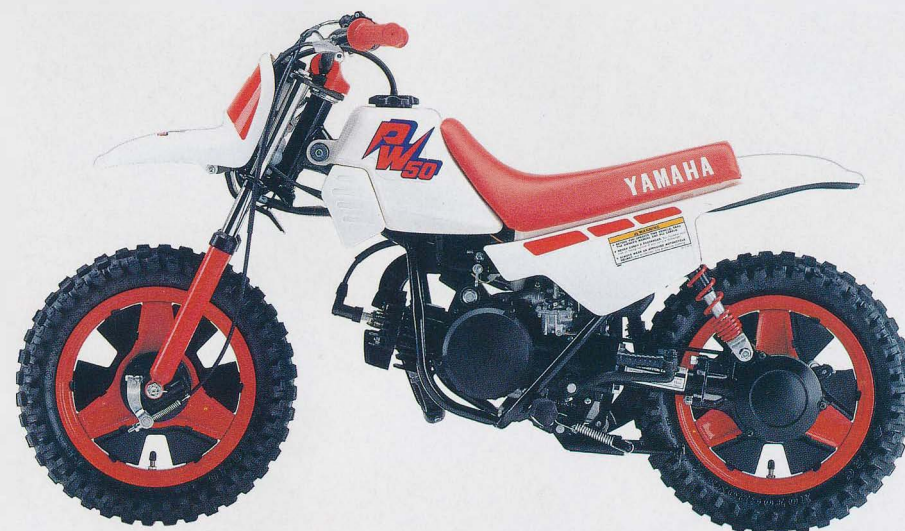

PW80 SPECIFICATIONS

ENGINE	Ignition CDI	Min. ground clearance 185 mm
Type 2-stroke, Torque Induction, single cylinder	Starter system Kick	Dry weight 57 kg
Displacement 79 cc	Fuel tank capacity 4.9 l	Suspension
Bore & stroke 47.0 x 45.6 mm	Oil tank capacity 0.95 l	Front Telescopic forks
Compression ratio 6.6 : 1	Transmission 3-speed with automatic centrifugal clutch	Rear Monocross
Max. power (DIN) 4.8 PS (3.5 kW) @ 5,500 rpm	Final transmission Chain	Brakes
Max. torque (DIN) 0.64 kg-m (6.27 Nm) @ 5,000 rpm	CHASSIS	Front Drum
Lubrication Autolube	Overall length 1,540 mm	Rear Drum
Carburation Mikuni VM15	Overall width 640 mm	Tyres
	Overall height 880 mm	Front 2.50-14-4PR
	Seat height 635 mm	Rear 2.50-12-4PR
	Wheelbase 1,055 mm	

PW50 SPECIFICATIONS

ENGINE	Ignition CDI	Dry weight 37 kg
Type 2-stroke, Torque Induction, single cylinder	Starter system Kick	Suspension
Displacement 49 cc	Fuel tank capacity 2.0 l	Front Telescopic forks
Bore & stroke 40.0 x 39.2 mm	Oil tank capacity 0.3 l	Rear Unit swinging arm
Compression ratio 6.0 : 1	Transmission Automatic	Brakes
Max. power (DIN) 2.7 PS (2.0 kW) @ 5,500 rpm	Final transmission Shaft drive	Front Drum
Max. torque (DIN) 0.39 kg-m (3.8 Nm) @ 4,500 rpm	CHASSIS	Rear Drum
Lubrication Autolube	Overall length 1,245 mm	Tyres
Carburation Mikuni VM12	Overall width 575 mm	Front 2.50-10-4PR
	Overall height 715 mm	Rear 2.50-10-4PR
	Seat height 485 mm	
	Wheelbase 855 mm	
	Min. ground clearance 105 mm	

Always wear a helmet, eye protection and protective clothing. Yamaha encourage you to ride safely and respect fellow riders and the environment. Specifications and appearance of Yamaha motorcycles shown here may vary according to requirements and conditions, and are subject to change without notice. For further details, please consult your Yamaha dealer.

Mitsui Machinery Sales (U.K.) Ltd.
Oakcroft Road
CHESSINGTON/SURREY KT9 1SA
Tel: 01-3975111
Tlx: 929929



RICHARD STEVENS M/CS
14, ESTCOURT ST.
DEVIZES, WILTS.
TEL: 5467.
YAMAHA AGENTS

YAMAHA
YAMAHA MOTOR CO.,LTD.
LIT-3MC-0107116-90E