



YAMAHA

DT125R

www.legends-yamaha-enduros.com



www.legends-yamaha-enduros.com

RUGGED STREET STYLE. RADICAL DIRT ACTION.




suspension
combined with
tics

When you're looking for reliable weekday transport and radical weekend action the latest Yamaha DT125R is the way to go!

Ultra-reliable race-developed 125cc liquid-cooled engine produces a smooth band of responsive power for rapid acceleration.

And with its YZ motocrosser-based chassis the rugged-looking DT delivers superb highway comfort as well as great handling in the dirt!

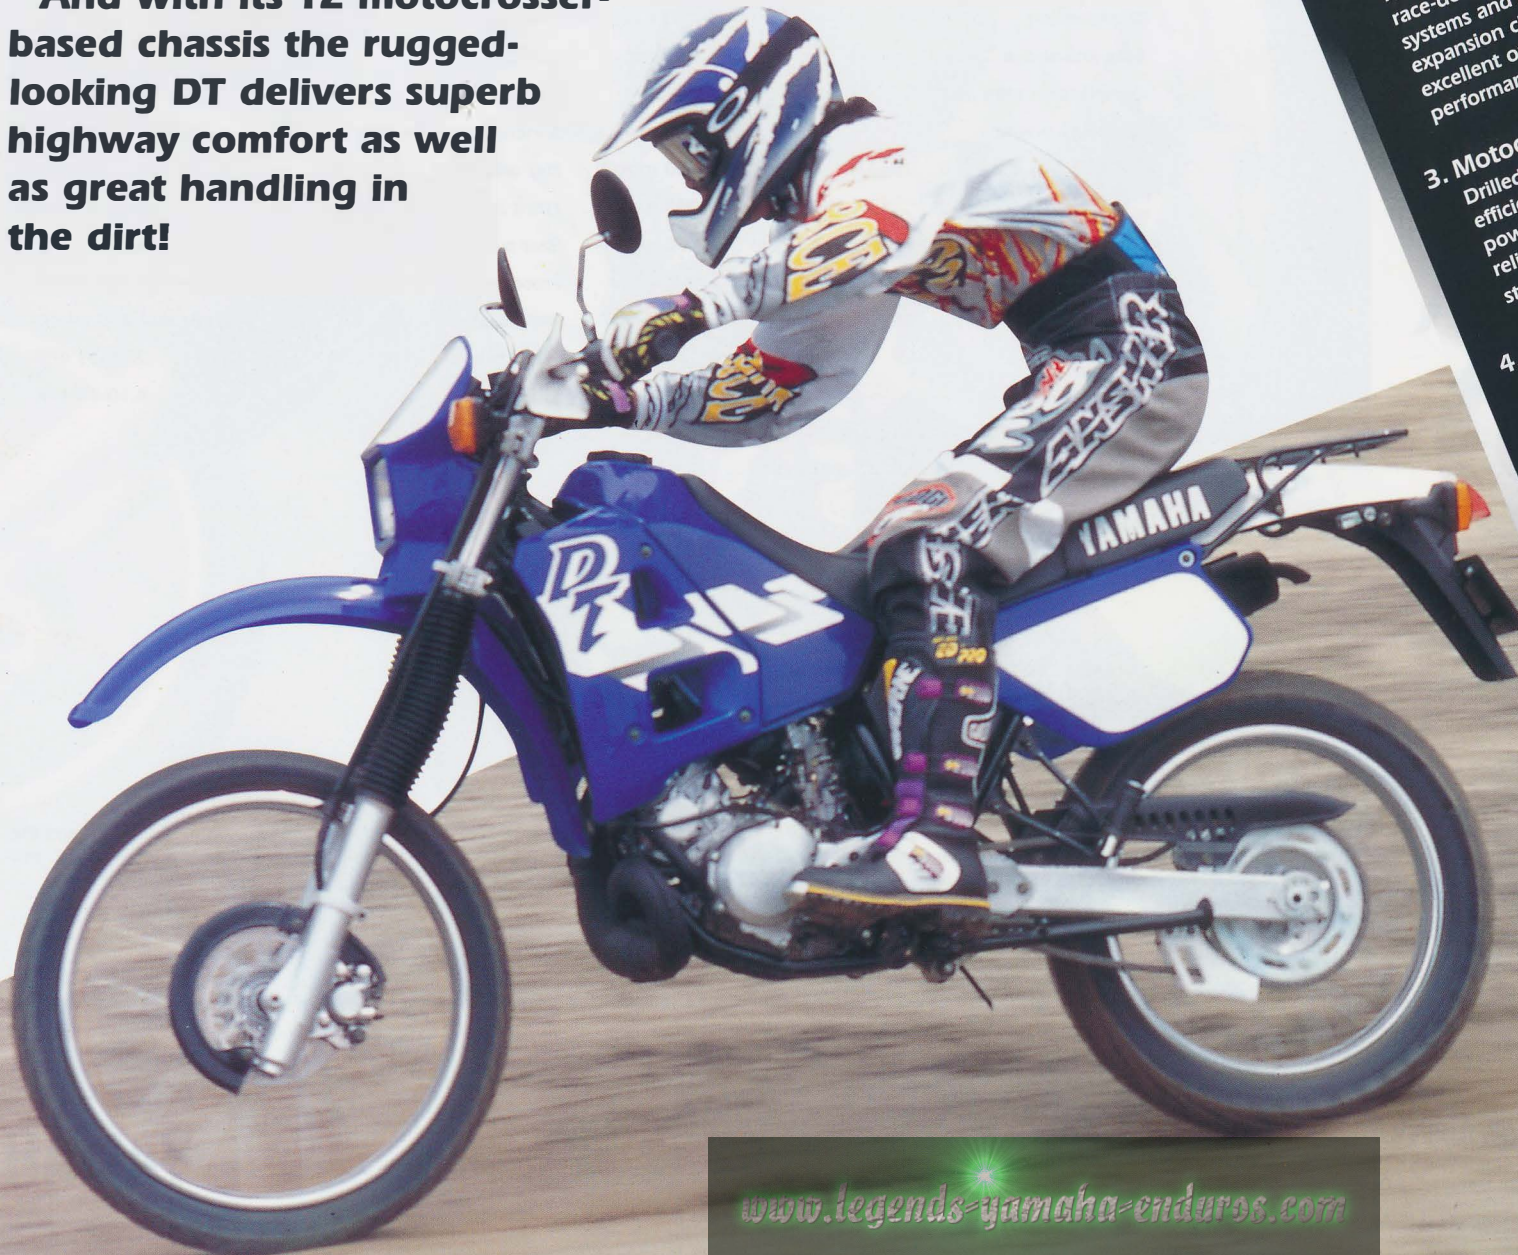

www.legends-yamaha-enduros.com

1. Long travel suspension
For superb comfort combined with excellent handling characteristics, this tough dual purpose machine runs with long travel front forks and a sturdy Monocross rear suspension system.

2. Race-developed engine
DT's liquid-cooled 2-stroke engine is fully equipped with Yamaha's race-developed YPVS and YEIS systems and a high efficiency expansion chamber exhaust for excellent on and off road performance.

3. Motocross type disc brakes
Drilled for lightness, the high-efficiency front and rear discs and powerful calipers ensure strong, reliable braking performance on the street and dirt.

4. Ultra rigid frame
Massively strong motocross-type semi-double cradle frame and tough box section swinging arm give precision handling to make the DT125R a fun machine in many conditions.

5. Rugged motocross styling
Based closely on the tank/seat and mudguards used on our YZ racers, the DT125R's tough bodywork looks just great - and for added convenience there's a lightweight rack.

6. Easy-read instruments
Fully equipped with a speedometer, water temperature gauge and well marked indicator lights, the DT's lightweight instrumentation is protected by the durable headlamp cowl.

5 HA

6



YB (Yamaha Black)



DPBSE (Deep Purplish Blue Solid E)



YB/PWS1
(Yamaha Black/Purplish White Solid 1)

DT125R TECHNICAL SPECIFICATIONS

ENGINE

Type2-stroke, liquid-cooled crankcase
reed-valve, single cylinder

Displacement124 cc

Bore and stroke56 x 50.7 mm

Compression ratio6,5 : 1

Maximum power
(DIN)13 HP (9.6 kW) @ 7,000 rpm
(ISO)12.1 HP (9 kW) @ 7,000 rpm

Maximum torque1,3 kg-m (13,1 Nm) @ 6,500 rpm

LubricationAutolube

CarburationTM28SS/1

IgnitionC.D.I.

Starter systemKick

Fuel tank capacity10 litres

Oil tank capacity1.2 litres

Transmission6-speed

Final transmissionChain

CHASSIS

Overall length2,160 mm

Overall width830 mm

Overall height1,255 mm

Seat height885 mm

Wheelbase1,415 mm

Minimum ground clearance315 mm

Dry weight109 kg

Front suspensionTelescopic fork

Rear suspensionSwinging arm (Monocross)

Front brakeSingle disc 230 mm Ø

Rear brakeSingle disc 220 mm Ø

Front tyre2.75-21 4PR

Rear tyre4.10-18 4PR

Always wear a helmet, eye protection and protective clothing. Yamaha encourage you to ride safely and respect fellow riders and the environment. Specifications and appearance of Yamaha products shown here may vary according to requirements and conditions, and are subject to change without notice. For further details, please consult your Yamaha dealer.

DEALER

YAMAHA MOTOR (UK) Ltd.
Sopwith Drive
Brooklands, Weybridge, Surrey KT13 0UZ
Tel.: 01932 358000
Information Hot line: 01932 358121

YAMAHA MOTOR (UK) Ltd.
use and recommend Mobil Oil

Mobil

www.legends-yamaha-enduros.com

<http://yamaha-motoreurope.com>

YAMAHA
YAMAHA MOTOR EUROPE N.V.

LTN-3MC-0107019-98E